


58. 4000

INSTALLATION MANUAL

This product should only be fitted by a fully qualified installer.

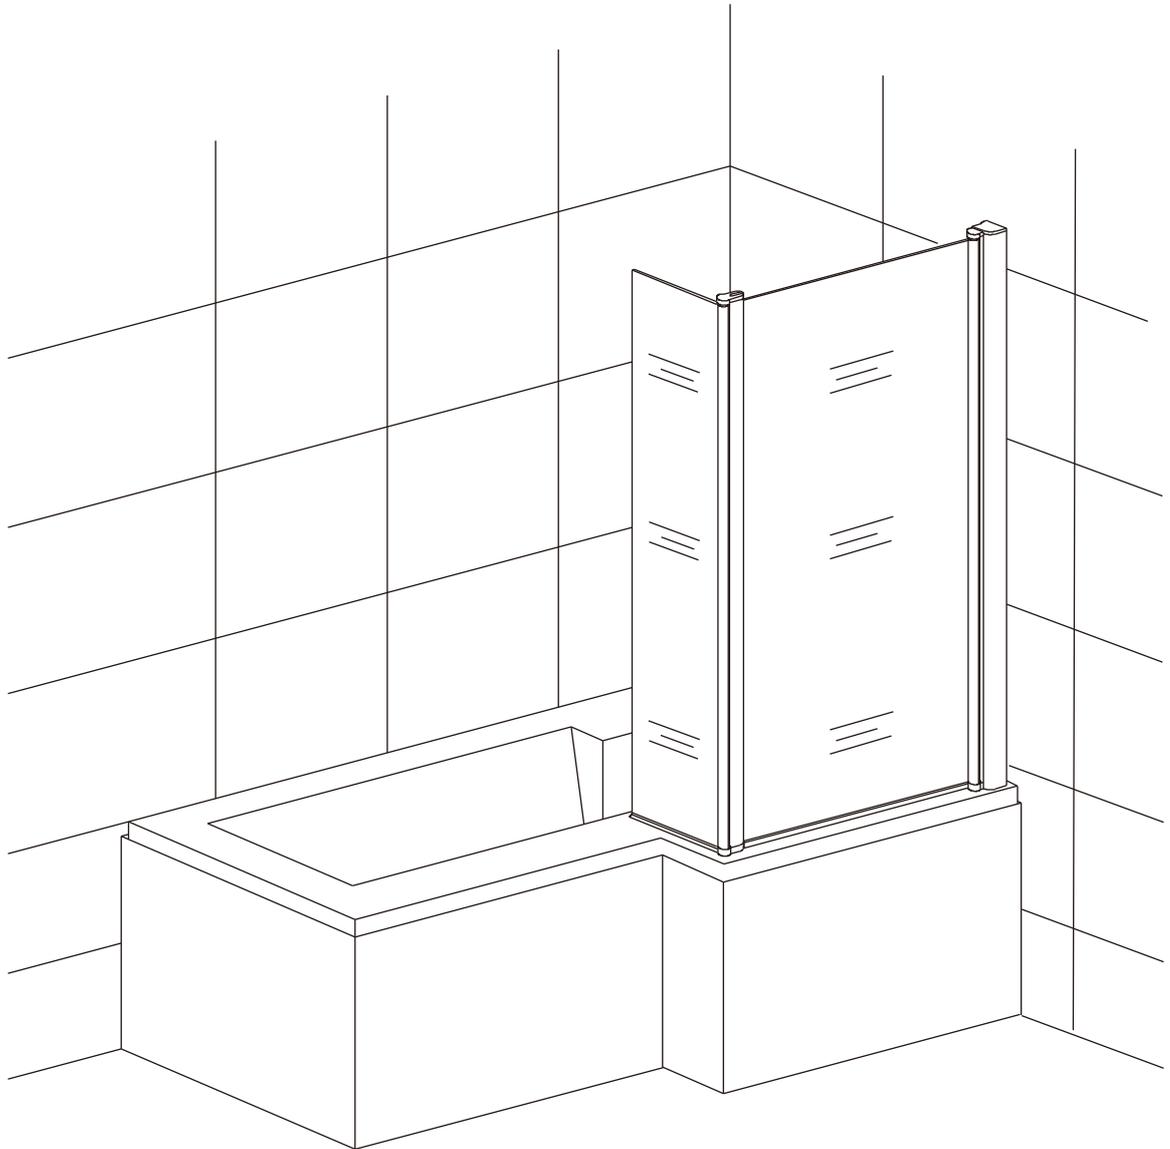

*This product must be unpacked and checked for quality prior to installation.
*Any missing parts or damage must be reported to your supplier within 10 days of purchase and before installation.
No claims can be enforced outside of these terms.




TOOLS REQUIRED




Pencil



($\varnothing 6 \times 3.2$) bit drill



Silicone gun



Flat and cross screwdriver



Tap measure




Spirit level



Electric drill




Spanner




Rubber hammer


SPARE PARTS




A



B




C




D




E




F




G




H




I




J



K




L




M

Please make the following checks before connecting the installation:
 *The product supplied is the required size and the adjustment is compatible with the site situation.
 *Check all component parts are present, see packing list and product schematic diagram for reference.
 *Make sure you have all the required tools.

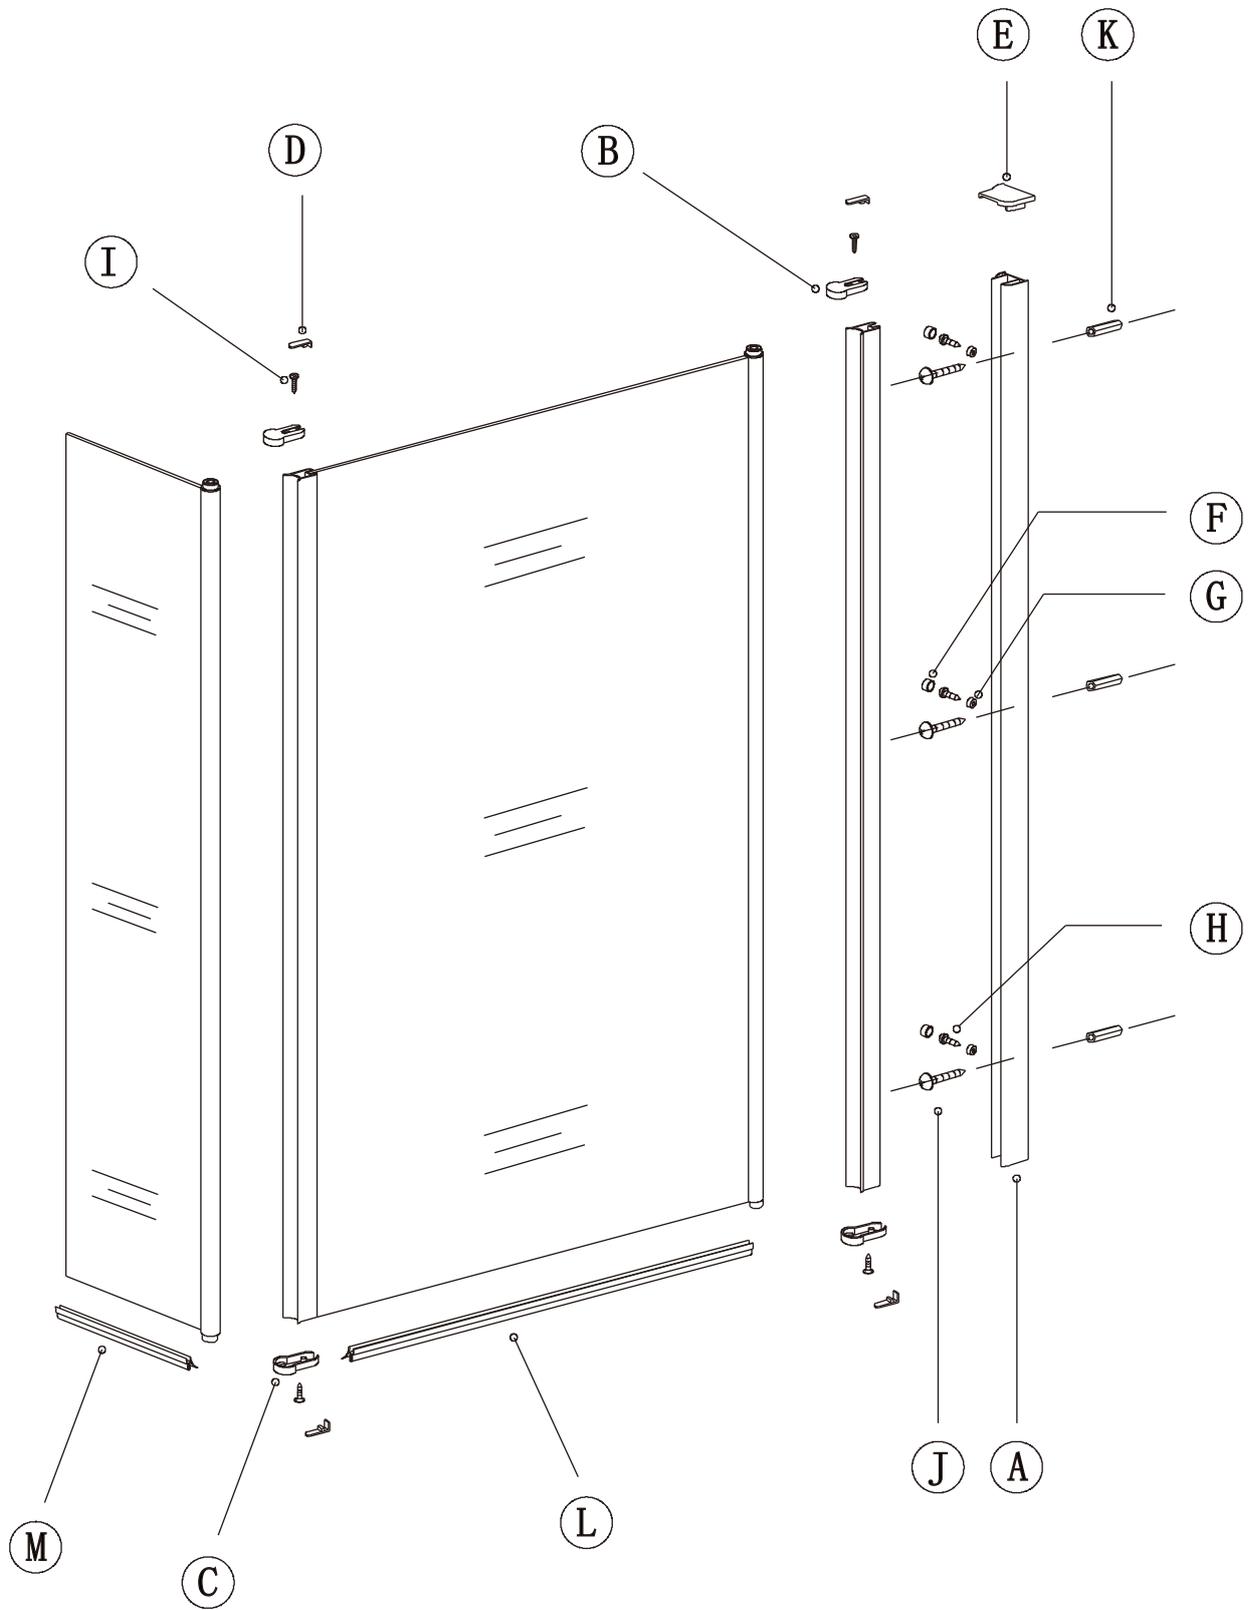


1

Dry fit required for best position to connect wall profile.

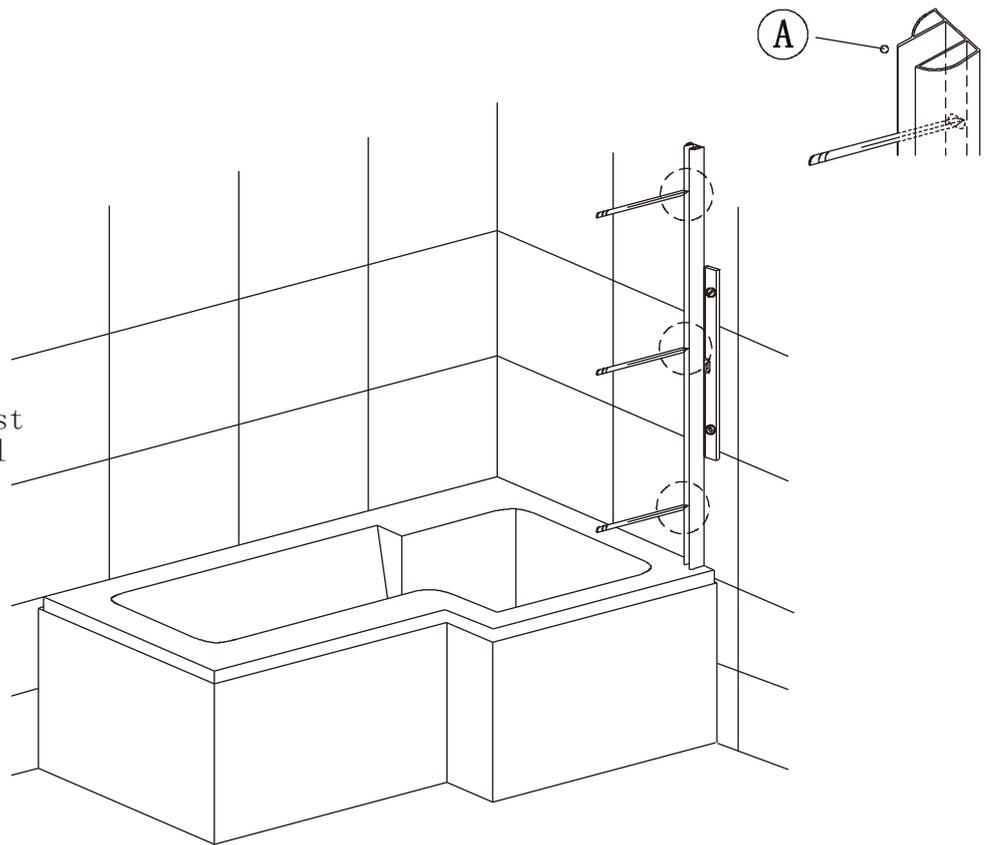


2

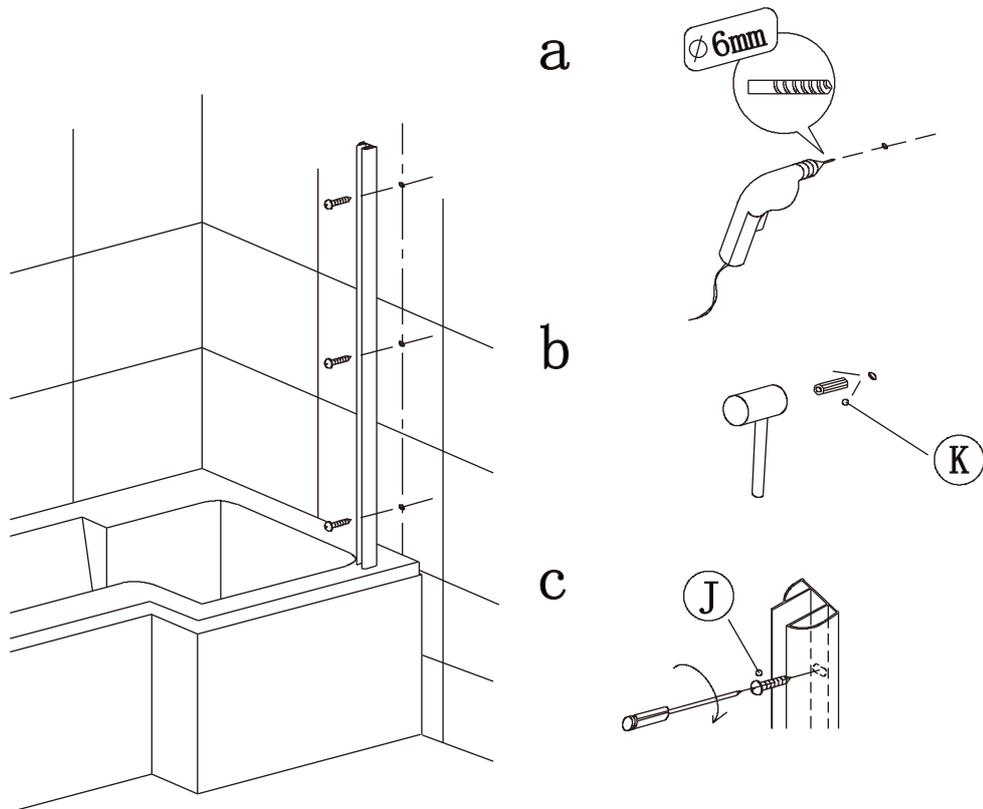


Drill holes in wall. Fit wall plugs if a solid wall, substitute for hollow wall if necessary (not supplied) Fit wall profile with ST5*30.

(1)

3

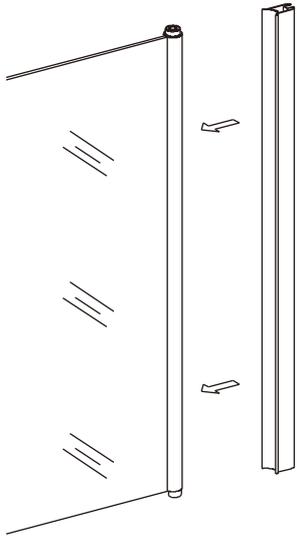


4

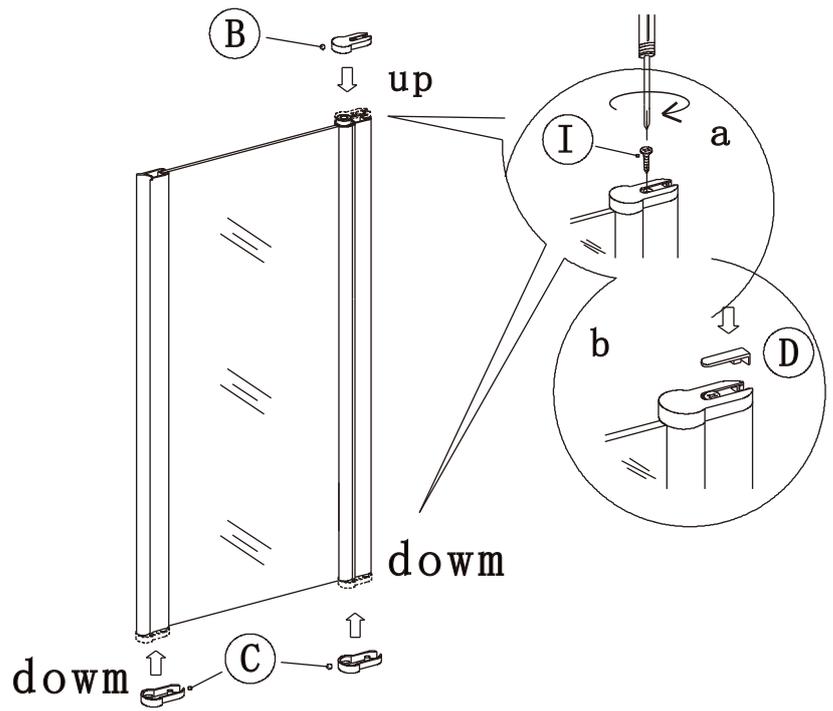

Fit connecting profile to barrel hinge of main screen ensuring part (C) is on the bottom and part (B) on the top. Fit second part (C) to opposite cover of screen.



5

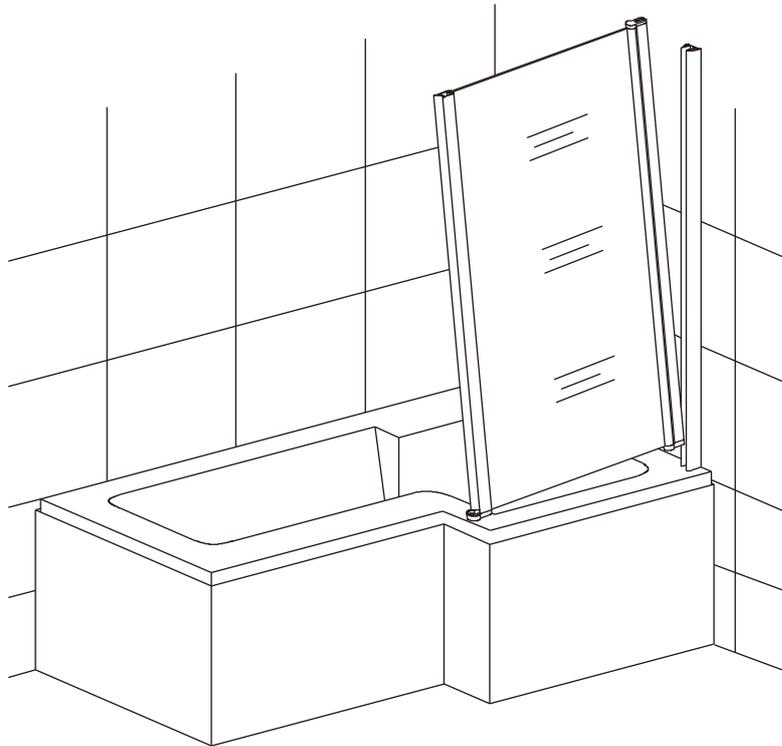

Fit main panel into wall profile.



(2)

6

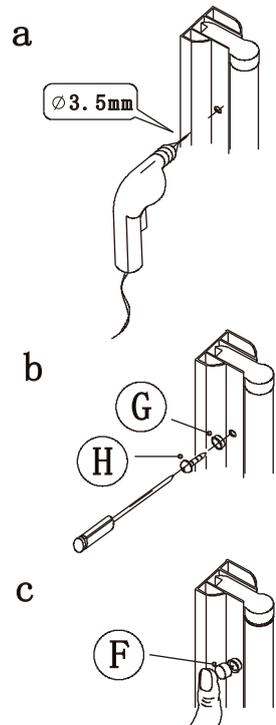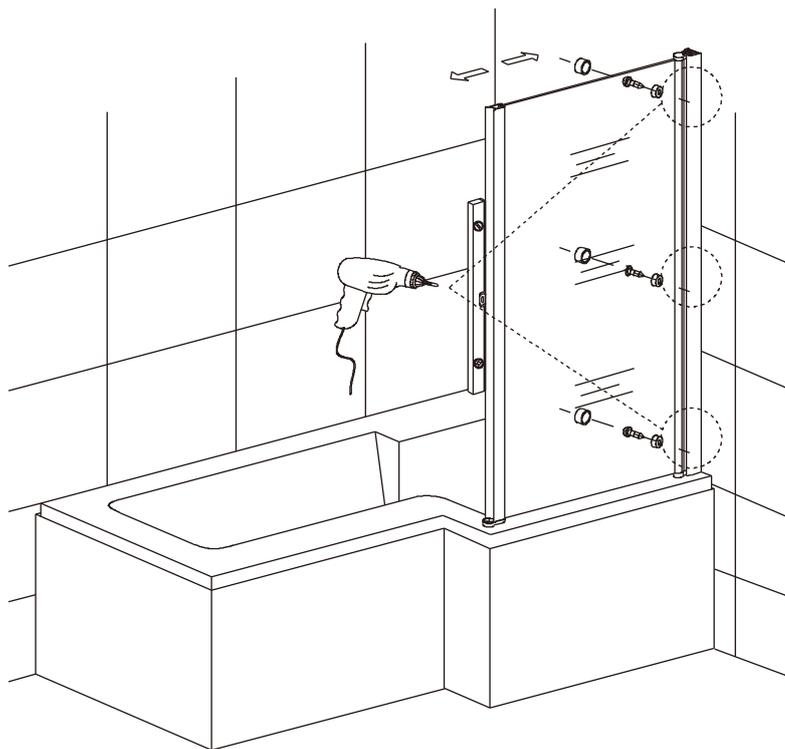


Level main panel ensuring both part (C) on underside of screen are in contact with the bath. Fix in position with ST4*12 (F) and (G) screw cover caps and washers.

7

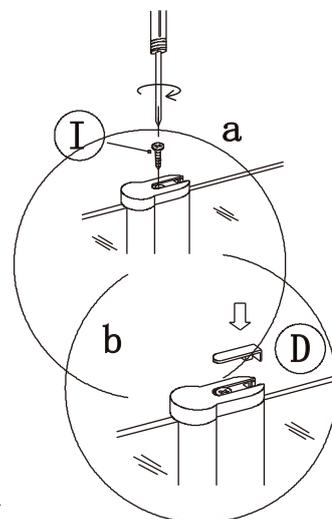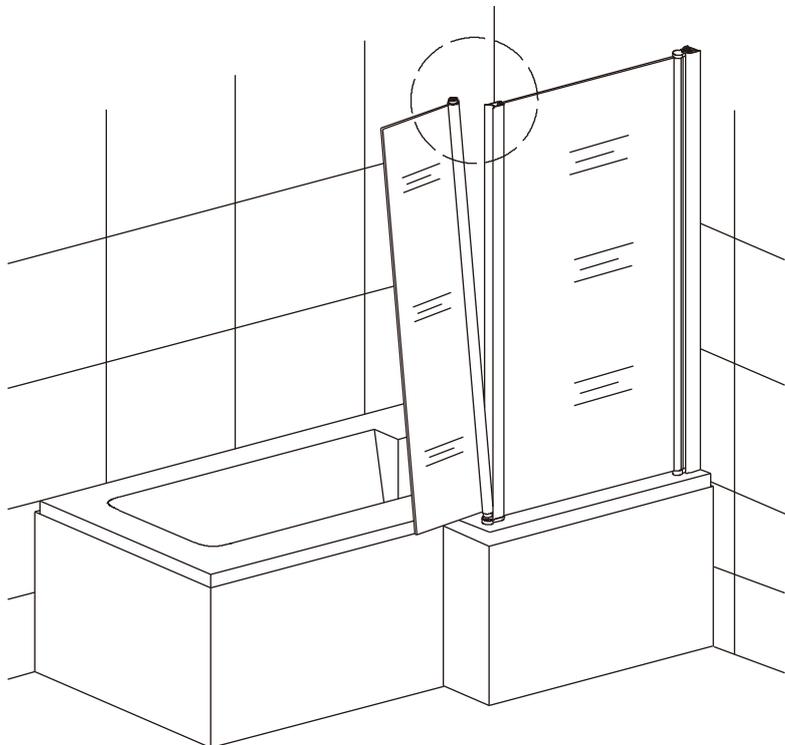

Slot extension screen into part (C) at bottom front end of main panel - position in a straight line.
Secure top of extension screen onto main screen with part (B) and ST4*12 screw.

8

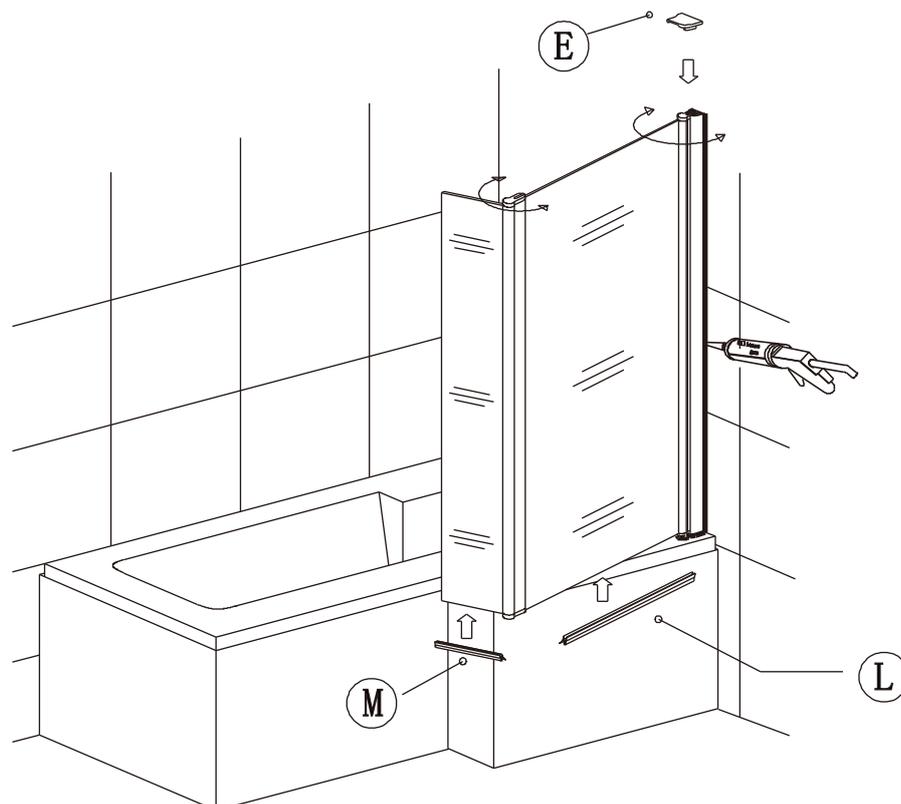

Fit bottom seal (L) and (M) and profile cover cap (E). Silicone wall profile and bottom hinge on outside only as illustrated.

Cleaning & Maintenance

Don't clean the shower enclosure with irritant detergent such as alcohol, bleach or other chemical cleaners.
Only clean with warm soapy water.

Helpline: 01452317890

Monday-Friday: 8:00 a.m.-5:00 p.m.

(4)