

# CRU 3TH WMBAS BB

## CRUZAR Tap Range Cruzar 3 Tap Hole Wall Mounted Basin Mixer Brushed Brass



### Features:

- This tap has a flow regulator, which limits the flow of water to 5 litres per minute, reducing the amount of water you use
- On-trend brushed brass finish to make a statement in your bathroom.
- Long life 1/4 turn ceramic disc valves for added durability and smooth control.
- Also available in other finishes.
- Co-ordinating Bathroom taps, Recess shower and Accessories available.

### Product Certifications:




For more products, visit our website:  
<http://www.bristan.com>



### Specification

Product Type:	Bathroom Taps
Main Construction Material:	Brass
Mount Type:	Wall
Handle Type:	Crosshead
Connection Inlet:	15mm Compression
Connection Outlet:	5lpm Coin-Slot Aerator
Number of Tap Holes:	3
Valve/Cartridge Type:	1/2" Ceramic Disc Valve - 1/4 turn
Plumbing System Requirements:	Suitable for all plumbing systems
Minimum Dynamic Pressure (bar):	0.5 bar
Maximum Dynamic Pressure (bar):	5 bar
Maximum Hot Water Temperature °C:	65°C
Maximum Static Pressure (bar):	10 bar
Flow Type:	Single
Isolation Included:	No

### Dimensions (measurements in mm)

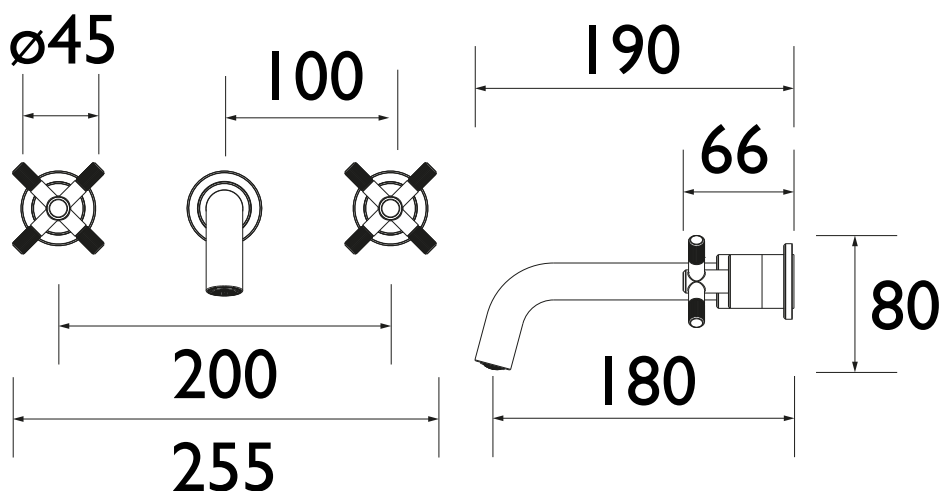

### Flow Rates (l/min)

System Pressure (bar)	0.5	1	2	3	4	5
CRU 3TH WMBAS BB (mixed)	2.9	3.8	4.4	4.5	4.6	4.8

TECHNICAL  
DATA  
SHEET



**BRISTAN**

D1

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: [www.bristan.com](http://www.bristan.com) Telephone: 0330 026 6273. Email: [enquire@bristan.com](mailto:enquire@bristan.com).

\* - 10 year guarantee applies to products purchased on or after 01/04/2021. Non-chrome product finishes carry a 3 year guarantee on finish. See [www.bristan.com/guarantees](http://www.bristan.com/guarantees) for more information. The information contained on this page was correct at date of issue. Listed flow rates are indicative for the product. Different plumbing systems and flow regulators can produce higher or lower results. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances.

Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.