


GLOW THERMOSTATIC MULTI-ENTRY INSTANT SHOWER



A

Dimensions

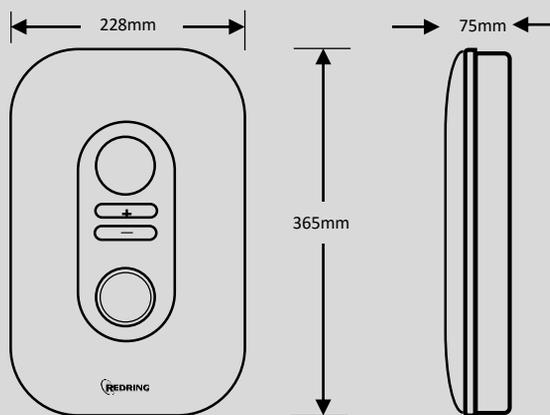

Product Description

Glow Thermostatic electric showers with highly accurate temperature control for safety, comfort and complete piece of mind. They also feature simple push-button controls and multiple service entry-points for ease of installation.

Key Features

- Accurate, temperature control to within $\pm 1.5^\circ$ for a comfortable, safe showering experience
- Tactile push-button controls with audible confirmation for ease of operation
- Large digital LED backlit temperature display
- Phased shutdown safety protection for next user cool start up and scale protection
- Temperature limiter lock option - set at installation
- SmartFit Technology, multi-entry connection options (8 for water and 6 for power)
- 600mm riser rail with adjustable fixing brackets, 5-mode easy rub-clean shower head, 1.5 metre flexible shower hose, push-button sliding handset clamp and a soap dish with integral hose retainer

Range Details


Item Code:	Model No:	Description	kW
53537101	RGS8T	Glow Thermostatic Shower	8.5
53537201	RGS9T	Glow Thermostatic Shower	9.5

Technical Details

Model	RGS8T	RGS9T
Item Code	53537101	53537201
EAN /Bar Code No.	5017084537112	5017084537204
Output (kW)	8.5	9.5
Current Rating (Amps)	36	40
Energy Rating (Class)	A	A
Energy Rating (%)	39	39
Consumption (kWh/annum)	478	478
Load Profile	XS	XS
Sound (dB)	15	15
Operating Pressure (psi/bar)	(15/1) - (150/10)	(15/1) - (150/10)
Thermal Cut-out Protection	49°C	49°C
Minimum Flow Rate (Ltr/min)	1	1
Thermostatic Control Accuracy	$\pm 1.5^\circ\text{C}$	$\pm 1.5^\circ\text{C}$
Shower Start-up Temperature	43°C	43°C
Temperature selection range	25 - 47°C	25 - 47°C
IP Rating	IPX4	IPX4
Approvals / Mark	BEAB & CE	BEAB & CE
UK Warranty (years)	3	3

GLOW THERMOSTATIC MULTI-ENTRY INSTANT SHOWER

Power and Water Connectivity

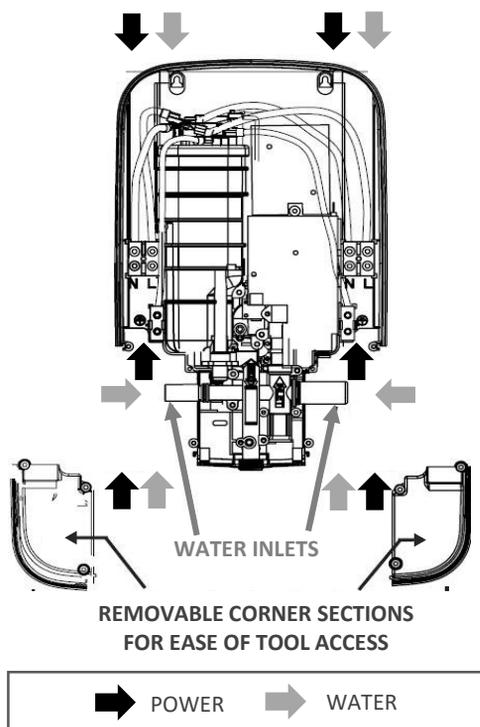

Product Packaging Data

Model	RGS8T / RGS9T
Item Code:	53537101 / 53537201
Single unit pack dimensions (mm)	250 x 590 x 115
Shower gross weight (Kg)	3.3
Shower unit net weight (Kg)	2.83
Carton weight of cardboard (Kg)	0.35
Transit box containing 6 showers (mm)	535 x 625 x 370
Full pallet quantity	90
Pallet Layer	30

Certification

BEAB Approved	Yes
CE Marked	Yes

Pack Contents

- 1 x Instant Electric Thermostatic Shower Unit
- Shower accessory kit comprising of:
 - 1 x 600mm long 22mm diameter riser rail with flexible fixing centre brackets
 - 1 x 5 mode easy rub-clean showerhead
 - 1 x 1.5m anti-kink flexible shower hose
 - 1 x Push-button sliding adjustable shower head clamp
 - 1 x Soap dish with integral hose retainer
- 1 x Screw and wall plug fixing pack
- 1 x ErP energy rating label
- 1 x Installation and user guide

