




This product is suitable for installation in zones: **2** **02**


All installations must comply with guidelines which are based on a zonal concept. The diagram above illustrates this concept and must be followed to ensure the safe installation of electrical appliances in the bathroom. These regulations apply to domestic installations only. Installations must be made in accordance with the current IEE wiring regulations and relevant building regulations. HiB recommends that all electrical bathroom products should only be fitted by a suitably qualified, Part P registered electrician.

Mounting Points Diagram

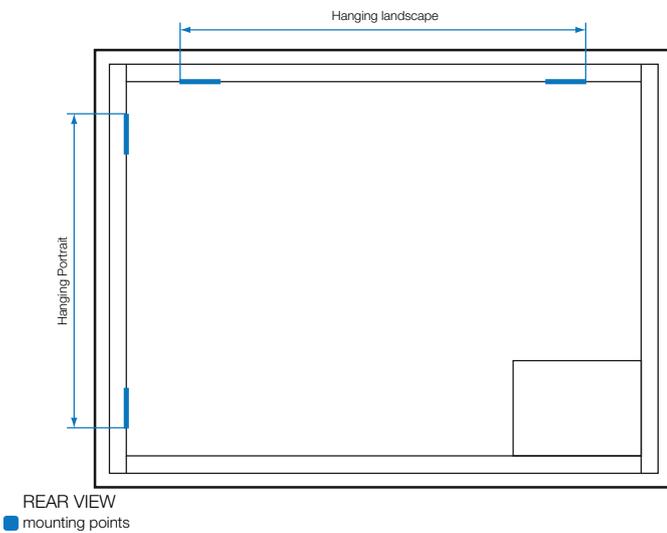

NB. This product must be installed with a minimum distance of 150mm between the infra-red sensor switch and any adjacent wall or object to ensure correct operation of the sensor.

Wiring Diagram

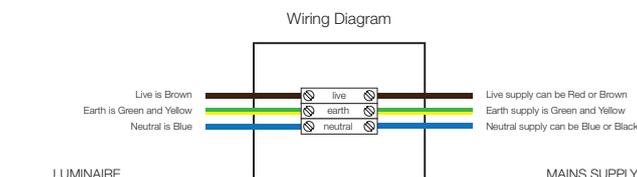

Globe 45 Art No.78400000 /
Globe 50 Art No.78500000/
Globe 60 Art No.78600000

Thank you for purchasing this HiB product.

Please read through these instructions carefully and refer back to them during installation to ensure that your product is fitted safely and that it retains its high quality finish.

Please retain this leaflet for future reference.

Before drilling, ensure there are no hidden cables or pipes in the wall.

Installation

1. Position the mirror in a suitable location (according to the zonal diagram opposite), ensuring that the domestic electrical mains supply is within reach of the electrical entry point of the product.
2. Carefully mark the position of the mirror using a soft pencil ensuring it is level. Remove the mirror and mark the mounting points. **Please ensure that all marked mounting points accurately match up with the fixing points on the mirror.**
3. Using a suitable drill bit, drill holes in the marked positions to a suitable depth. If drilling through tile, use a ceramic drill bit.
4. Insert wall plugs level with the surface of the wall. If fitting to a tiled surface, wall plugs should be inserted below the tile surface to avoid cracking. *NB. For plasterboard walls, specialist fixings should be purchased, available from any DIY or hardware store.*
5. Screw supplied brackets into wall plugs.
6. **Ensure the domestic electrical mains supply to which the mirror is being connected is turned off.** Connect the domestic mains supply to the terminal box according to the wiring diagram opposite.
7. Hang the mirror in position ensuring that the brackets slot into the mounting points.
8. Switch the domestic electrical mains supply for the mirror back on.

Operation Instructions

To turn illumination on or off, operate the sensor switch located at the bottom of the mirror.

Heated Pad is only on when mirror is illuminated.

Care Instructions

Do not use abrasives or solvents when cleaning this product.

Wipe off all water spillages as soon as possible using a soft, damp cloth.

Aftercare Service



In the unlikely event that this product should fail please contact HiB customer services, contact detail shown below.



WEEE compliance

Must not be mixed with general household waste

How to Isolate the sensor so you can switch ON & OFF with a mains switch!

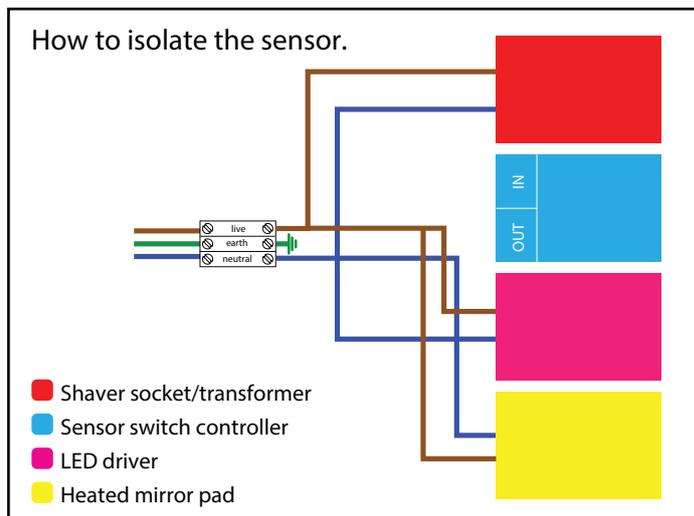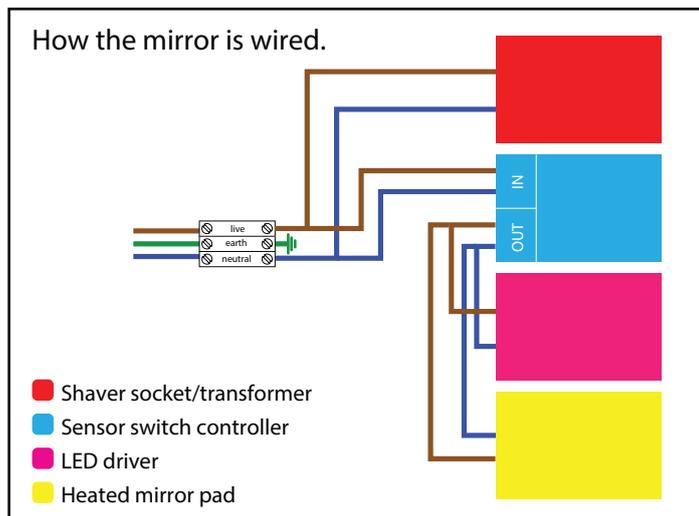

Re-wire the mirror as shown in the diagram above. HiB recommends that all electrical bathroom products should only be fitted by a suitably qualified, Part P registered electrician.

For further assistance on isolating the sensor please contact us.

Tel: 020 8441 0352

Email: sales@hib.co.uk