

Contents for In-fold Door

Parts Supplied

Ref	Description	Illustration	Qty	Ref	Description	Illustration	Qty
1	Wall profile		2	6	Handle		1
5	In-fold door		1	7	Wall profile cover	$\Diamond \Diamond$	lpair
9	Vertical seal		1				

Fittings Supplied

Ref	Description	Illustration	Qty	Ref	Description	Illustration	Qty
2	Wall plug	<u> </u>	8	8	Stainless steel Screw ST4X10	A) MINIS	6
3	Stainless steel Screw ST3.9X35		8	10	3MM Drill Bit		1
4	Screw cover cap		14	11	2mm Allen key		1

	ents for Si s Supplied	de Panel(Solo	d Sepai	rately	7)				
Ref	Description	Illustration	Qty	Ref	Description Ill			stration	Qty
12	Side panel		1	13	Corner profile cover			> <	lpair
Fitt	ings Suppli	ed	·			·			
Ref	Description	Illustration	n Qty	Ref	Description		I11	ustration	Qty
4	Screw cover cap	© ©	3	8	Stainless steel Screw ST4X10			A MINING	3
Tool	s Required(not supplied))						
Magneti Crosshe Screwdr	ad ♦ ≪	Power Drill(wind hammer action)	ith S	B		6MM Dri Bit(sui for wal type)	itable		m
Rubber	Mallet (Silicone Sealant	e			Scissors			
Spirit 1	Level D	Tape Mea	asure			Pencil		Ø	
Adjustal	ple								

Before You Start

·WARNING: Please read these instructions through carefully before you start the installation. Incorrect product installation may result in serious product failure in use.


Always follow the instructions and retain them for future use.


·The enclosure is designed to allow for 20mm adjustment when fitted to "out of true" walls.


The thickness of the tiles used will affect the overall position of the enclosure on the tray.


- ·Check the pack and ensure that you have all of the parts listed . If not, contact your vendor.
- ·When you are ready to start, make sure you have the right tools to hand, plenty of space and a clean dry area for assembly.
- ·Two people are required for assembly. Please note that although these instructions are comprehensive, it is always recommended that a technically competent installer should undertake installation.
- ·Ensure that the enclosure is fitted to a level tray or floor and vertical walls .
- ·Please note: The wall plugs included with this product are suitable for solid walls only. Plasterboard or stud walls may require specialized fixings which are not provided. (Always ensure that the wall plugs or fittings are correct for the wall type.)
- ·Caution: Please handle all glass with care. Any damage to the edges, or scratches to the surface that occur during assembly or normal use can cause the glass to break suddenly. Tempered glass will shatter into very small pieces that will still have sharp edges.
- ·Caution: Care should be taken when drilling into walls to avoid hidden pipes or electrical cables.
- ·When working near a tray or bath, ensure that the waste is covered so that small parts do not fall down it.


Assembly(recess installation)

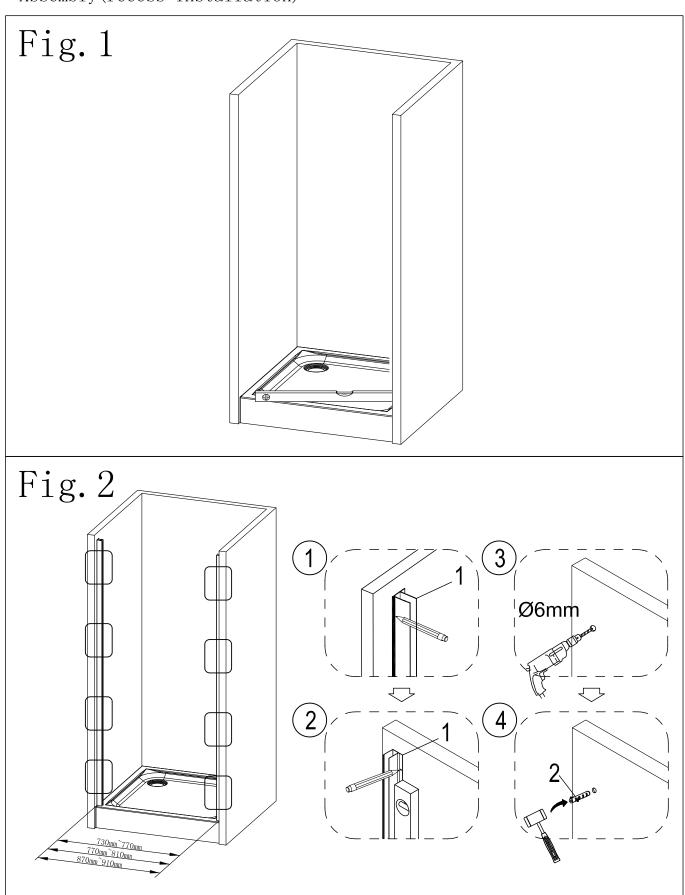


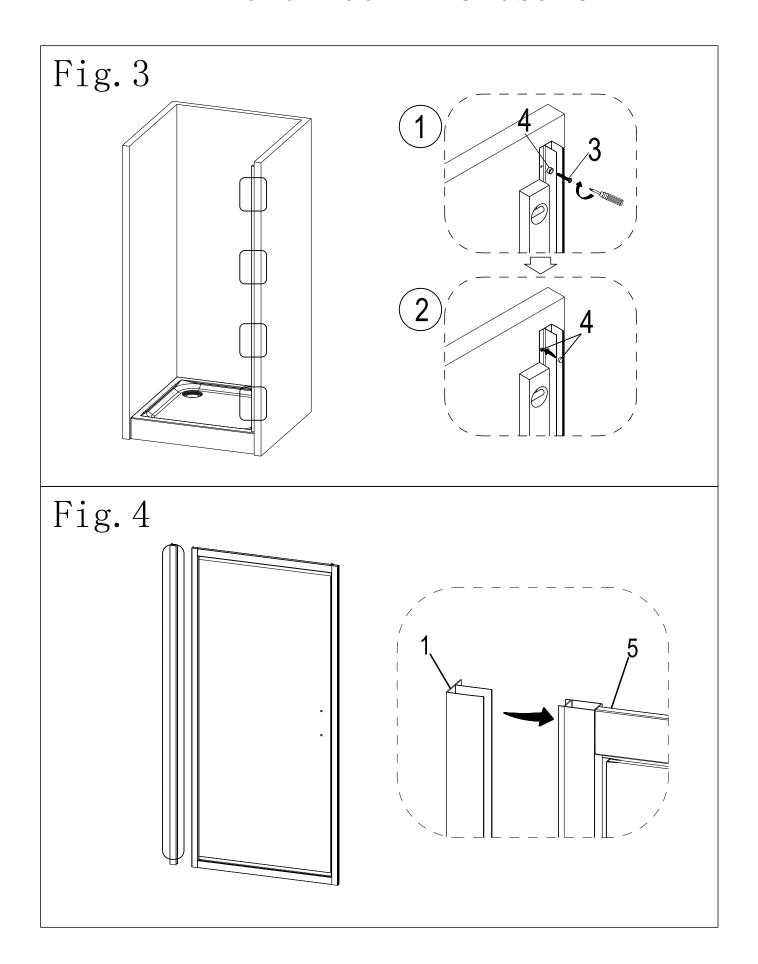

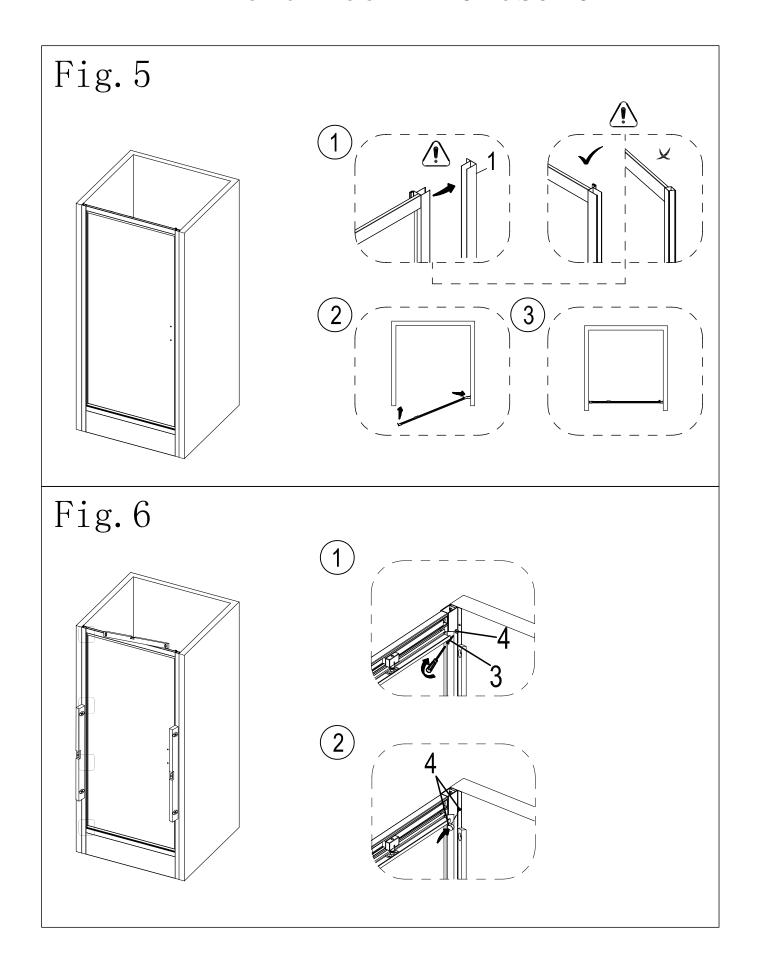


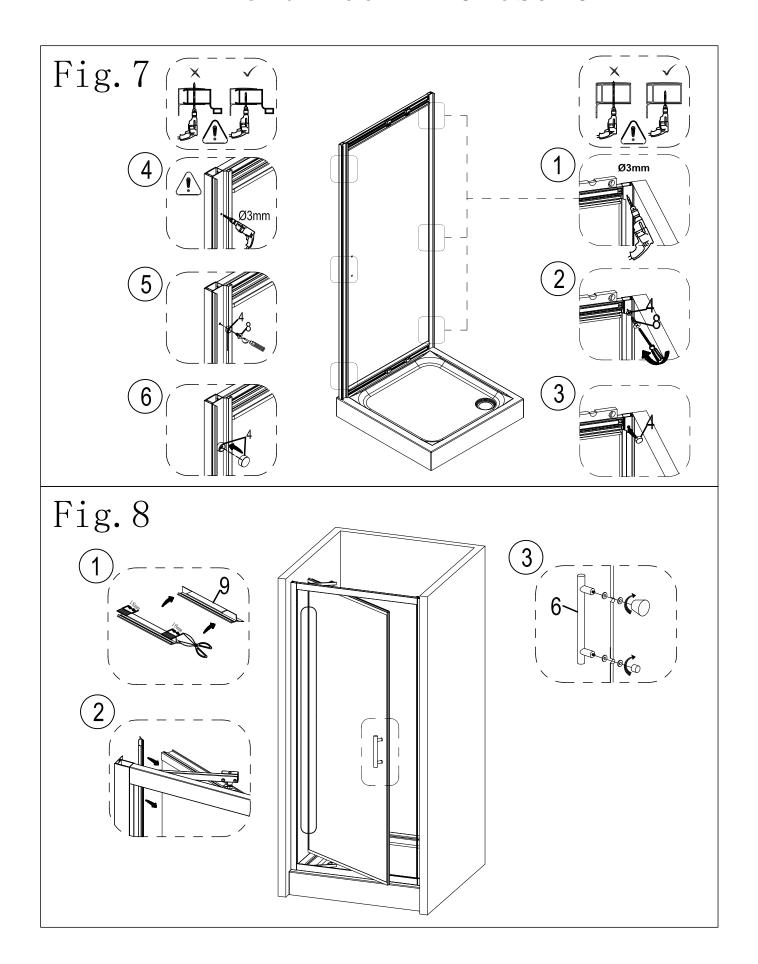


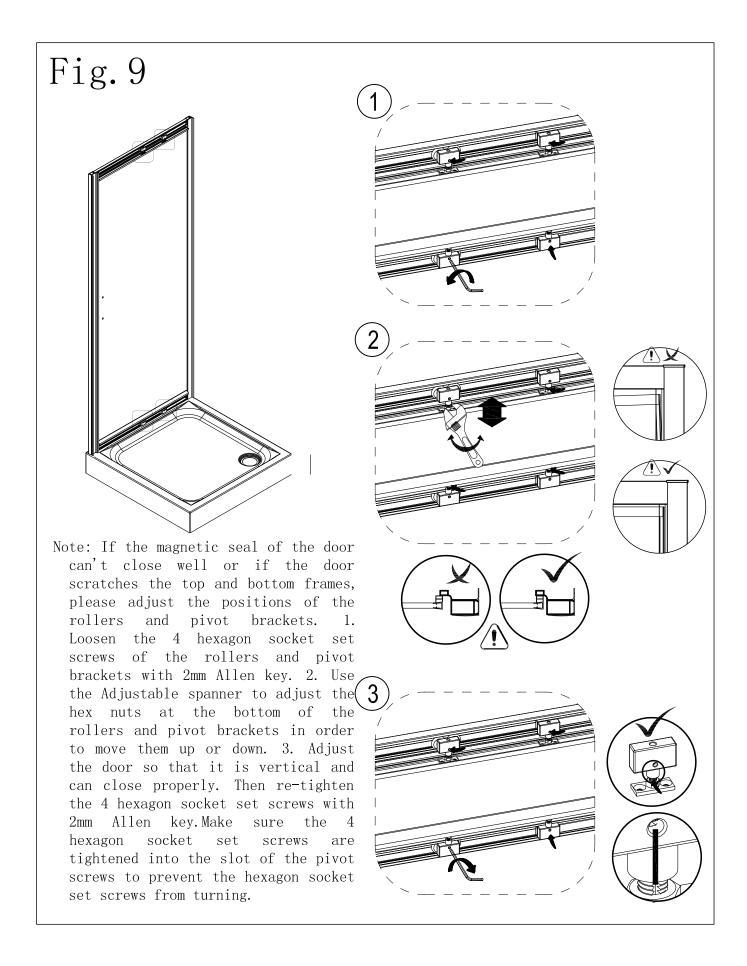

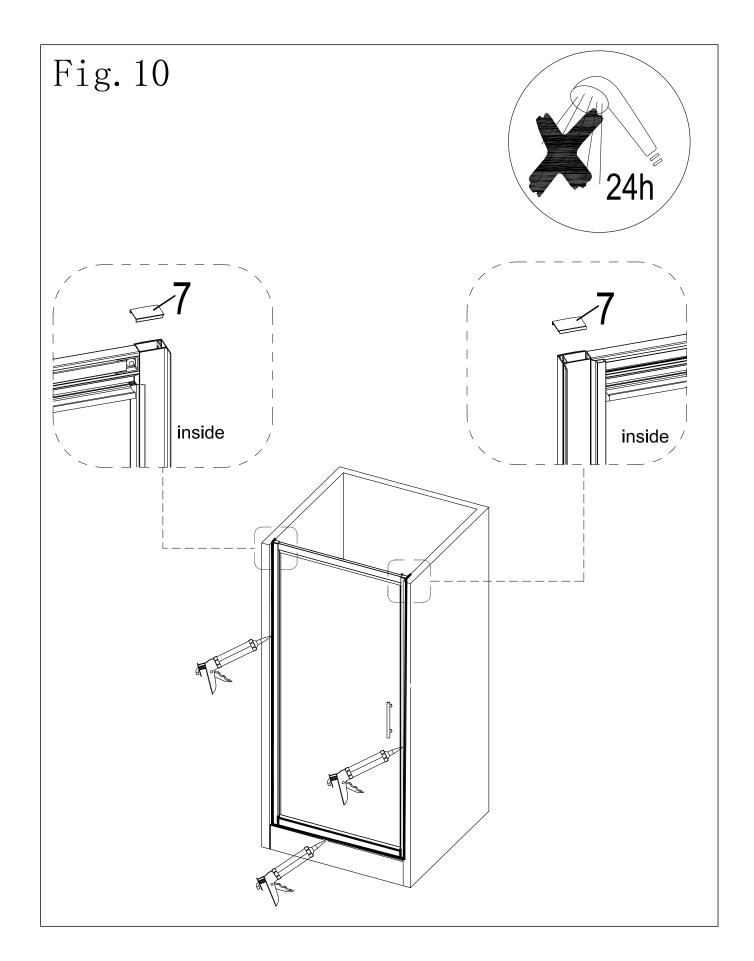

Assembly(In-fold Door and side panel installation)

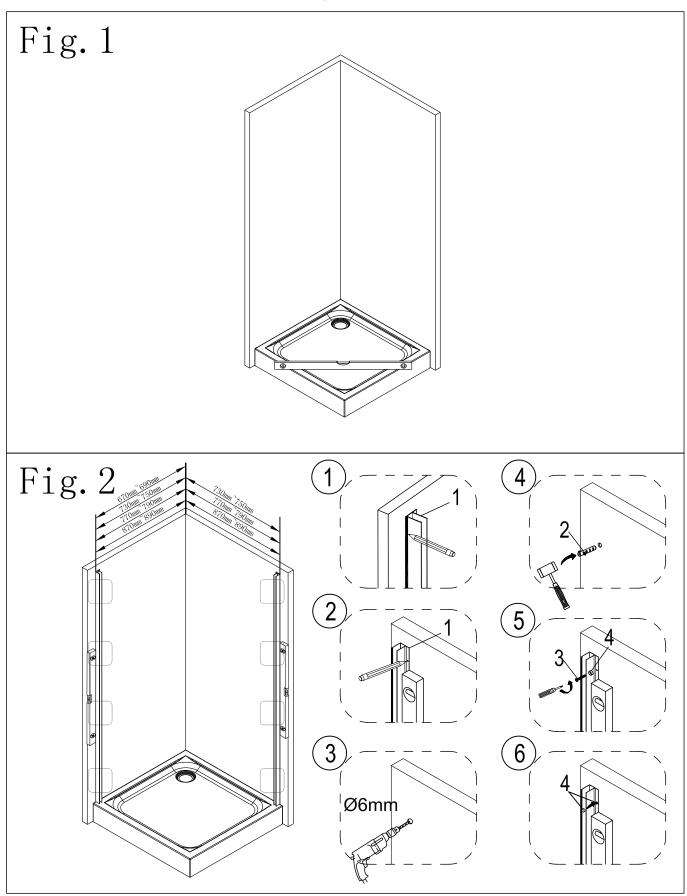

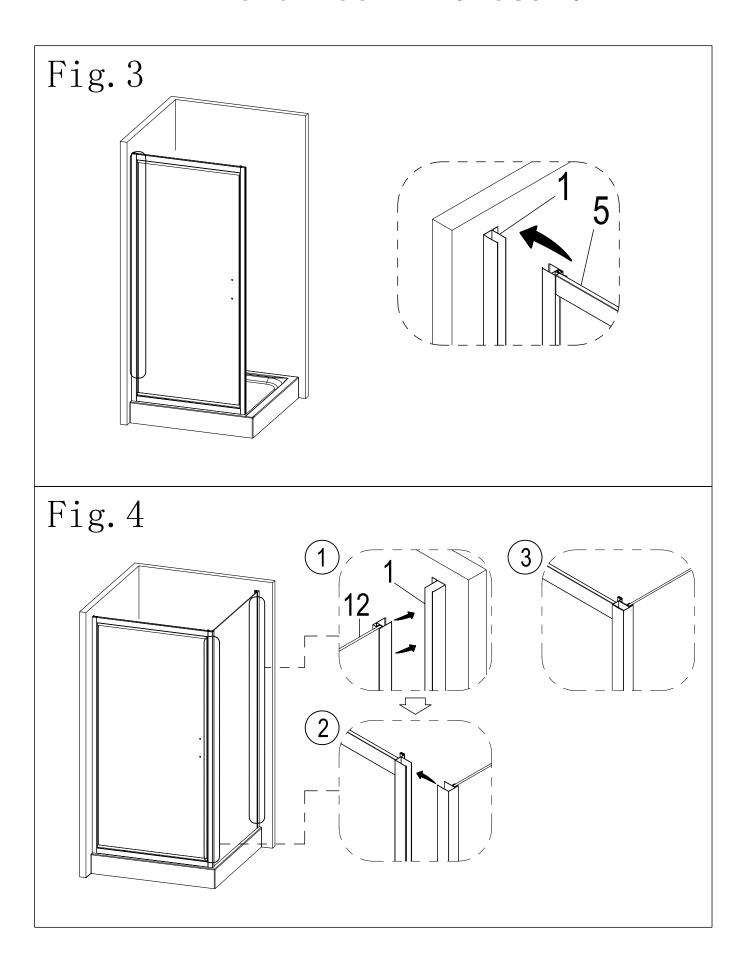




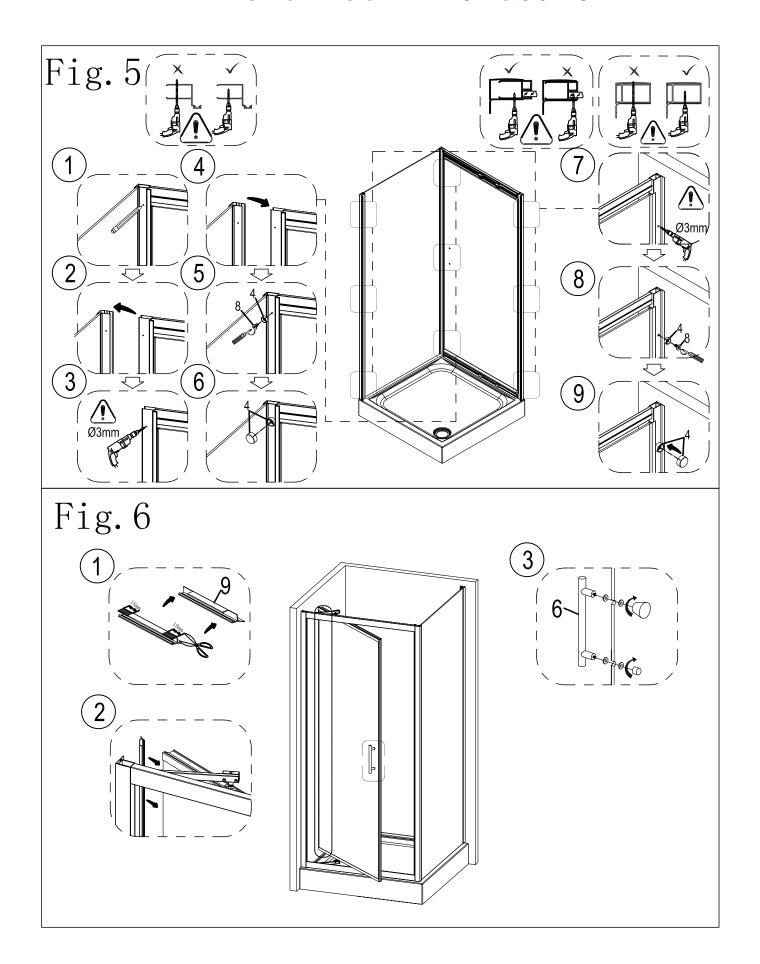


Fig. 7

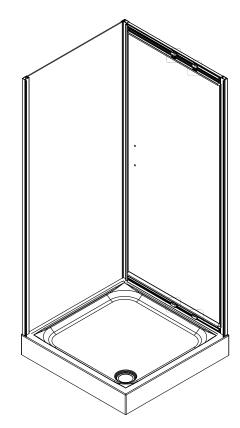

Note: If the magnetic seal of the door can't close well or if the door scratches the top and bottom frames, please adjust the positions of the rollers and pivot brackets. Loosen the 4 hexagon socket set screws of the rollers and pivot brackets with 2mm Allen key. 2. Use the Adjustable spanner to adjust the hex nuts at the bottom of the rollers and pivot brackets in order to move them up or down. 3. Adjust the door so that it is vertical and can close properly. Then re-tighten the 4 hexagon socket set screws with 2mm Allen kev. Make sure socket hexagon set tightened into the slot of the pivot screws to prevent the hexagon socket set screws from turning.

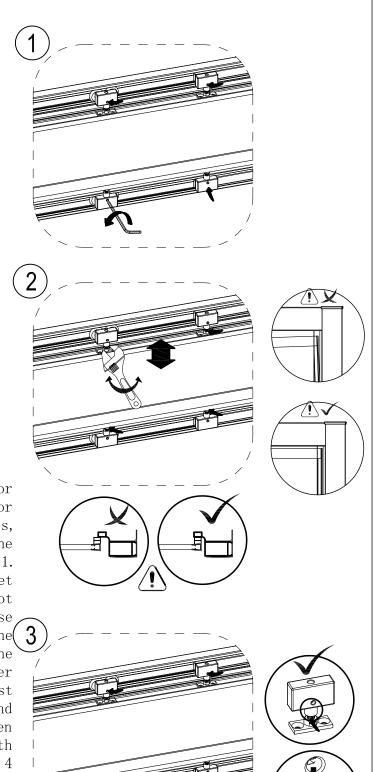

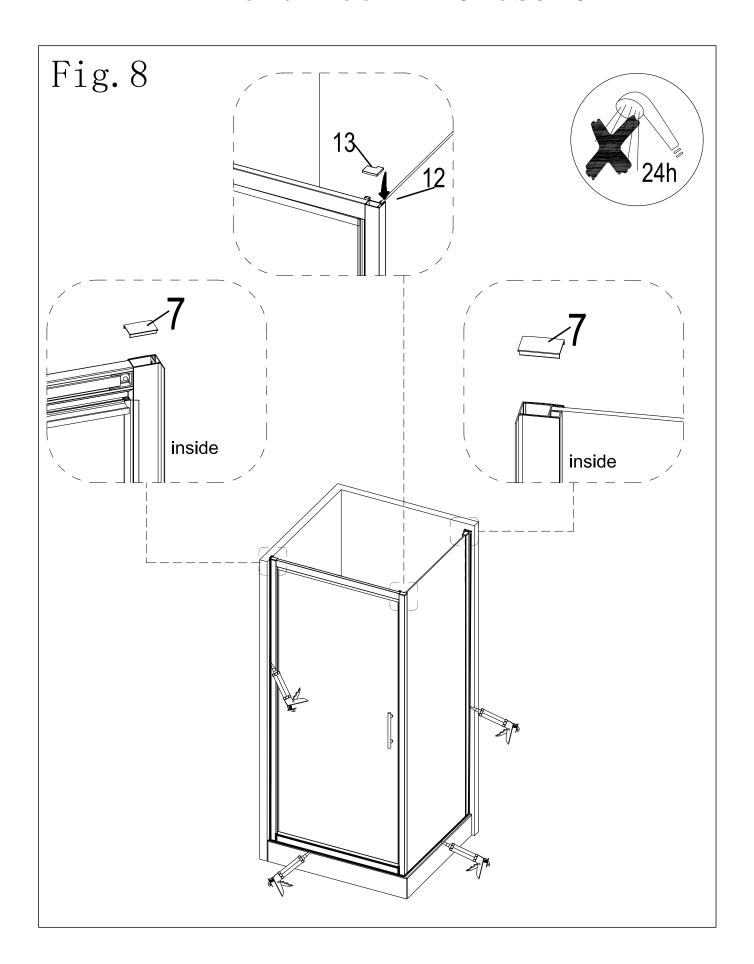

Care & Use Soapy water is adequate to keep the glass clean, although glass cleaner can be used if required. Scourers, abrasives and chemical cleaners can damage the glass and pattern, and should not be used. In hard water areas, insoluble lime salts may be deposited on the glass. If this is allowed to build up it becomes increasingly difficult to remove and looks unsightly. Regular cleaning will minimize this effect.