


MARBLE COMPOSITE WASHBASINS

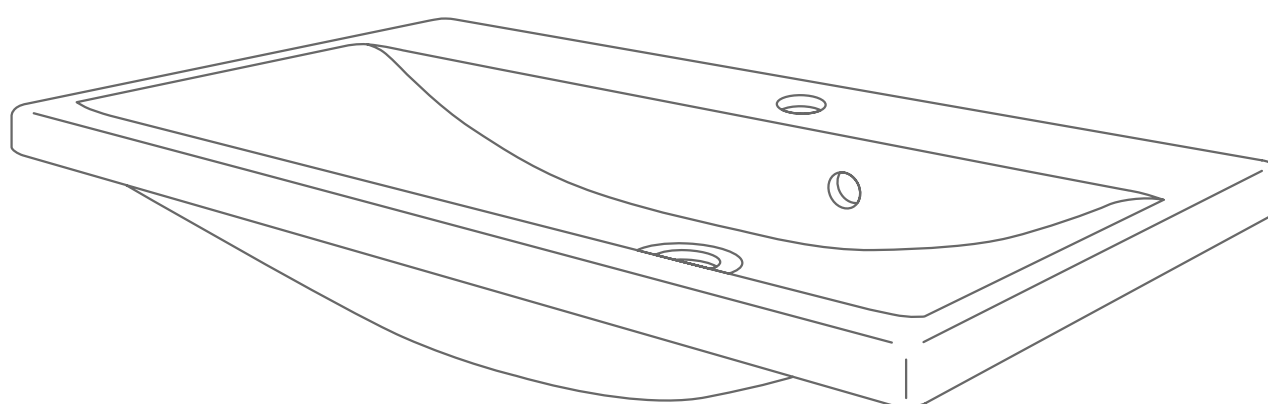

Please NOTE: Read the instructions carefully before installing the washbasin

1

STARTING WORK ...

These instructions are provided for your safety.
Please read them carefully before assembling the
washbasin and keep them for future reference.

Assembly instructions:

PLEASE NOTE: Before assembling the washbasin, the Customer is required to check if there is any transport damage on it.

1. Check the washbasin on a safe surface (preferably on a blanket).
2. In order to assemble the washbasin, apply a layer of silicone on the adjacent furniture edge and then carefully place the washbasin on the cabinet and seal the edges between the wall and the washbasin with silicone.
3. If, after assembling the washbasin, it is necessary to perform additional operations such as tiling or installing a mirror, the washbasin must be protected.
4. The washbasin cannot be used as the work surface.
5. Cracks and damages resulting from improper assembling will not be taken into account during the complaint procedure.

Care and maintenance recommendations:

PLEASE NOTE: Marble composite is a durable material that is easy to take care of, however, we would like to draw your attention to several important details and provide you with some simple tips on how to maintain and take care of it:

1. The washbasin must be cleaned with water and soap or delicate liquid detergents (such as wash-up liquid).
2. For the first 4 weeks clean the washbasin only with water and wash-up liquid or soap.
3. Do not use any detergents which contain abrasive substances, regardless of whether they are liquids or powders, as this results in the dulling of the surface.
4. Avoid contacts of the washbasin with red lipstick, nail varnish, hair-dying paints and other aggressive chemical substances. In the event of a contact with them, remove them immediately from the surface of the washbasin.
5. Do not use acidic or lye detergents. Also avoid contacts with such solvents as acetone or methanol.
6. The product is resistant to most chemical substances used in a household. However, substances such as solvents or paints must be removed immediately from it.
7. To protect against change of color or scratches, do not use the washbasin when dyeing fabrics or soaking them in basic water solutions.
8. It is allowed to hand-wash using delicate washing substances, although you run the risk of scratching the surface.
9. Water temperature cannot exceed 65°C.
10. Higher temperature may cause scratches and change of color.
11. We recommend polishing and waxing of the washbasin with delicate polishing substances (such as French polish or car wax) twice a year.
12. In case of dulling and scratches on the surface, the washbasin should be polished and waxed as described above.

Repair instructions:

PLEASE NOTE: When dealing with scratches and cracks, you must:

1. Separate the damaged places with adhesive tape.
 2. Smooth the damaged places with water abrasive paper (P 1500)
 3. Remove adhesive tape and polish the smoothened surface with (car) polishing paste.
- In case of own repairs, such faults cannot be then taken into account when making a complaint – the customer may only make a complaint about the faults they have not interfered with.

Technical tolerances:

1. Due to the individual process of manufacturing the washbasins, the allowable dimension tolerance is within 3mm. Such tolerance cannot be subject of a complaint.
2. Air bubbles, imprints, scratches or polishing marks at the bottom of the washbasin are the result of the manufacturing process and are practically of no importance, therefore they are not subject of a complaint, either.