

# NZA SHXAR BLK

## ONZA Shower Range Onza Thermostatic Exposed Shower Valve with Riser Kit Black



### Features:

- All in one box - pack includes shower valve, hose, hose retainer, riser rail and a rub-clean anti-limescale single function handset so nothing to buy separately.
- Easy installation with adjustable elbow inlets which enable you to use on existing pipework centres between 110mm and 155mm so there's no need for retiling.
- Rub-clean handset - limescale and debris build-up is quickly and easily removed by rubbing a finger or a cloth over the nozzles.
- On-trend matt black finish to make a statement in your bathroom.
- Thermostatic cartridge with preset temperature safety stop at 42°C for family-safe showering.

### Product Certifications:



WRAS Certificate No: 240403011  
WRAS Expiry Date: 30/04/2029


TMV2 Certificate No: NSF2126/0619  
TMV3 Expiry Date: 13/12/2024



### Specification

Finish/Colour:	Black
Main Construction Material:	Brass
No of Controls:	1
Shower Type:	Thermostatic
Shower Head Type:	Adjustable
Shower Kit:	Adjustable Riser
Valve/Cartridge Type:	Exposed
Maximum Hot Water Supply Temperature °C:	65
Plumbing System Suitability:	Suitable for all plumbing systems
Minimum Dynamic Pressure (bar):	0.2
Maximum Dynamic Pressure (bar):	5
Maximum Static Pressure (bar):	10
Connection Inlet:	15mm Compressions
Connection Outlet:	G 1/2"

### Dimensions (measurements in mm)

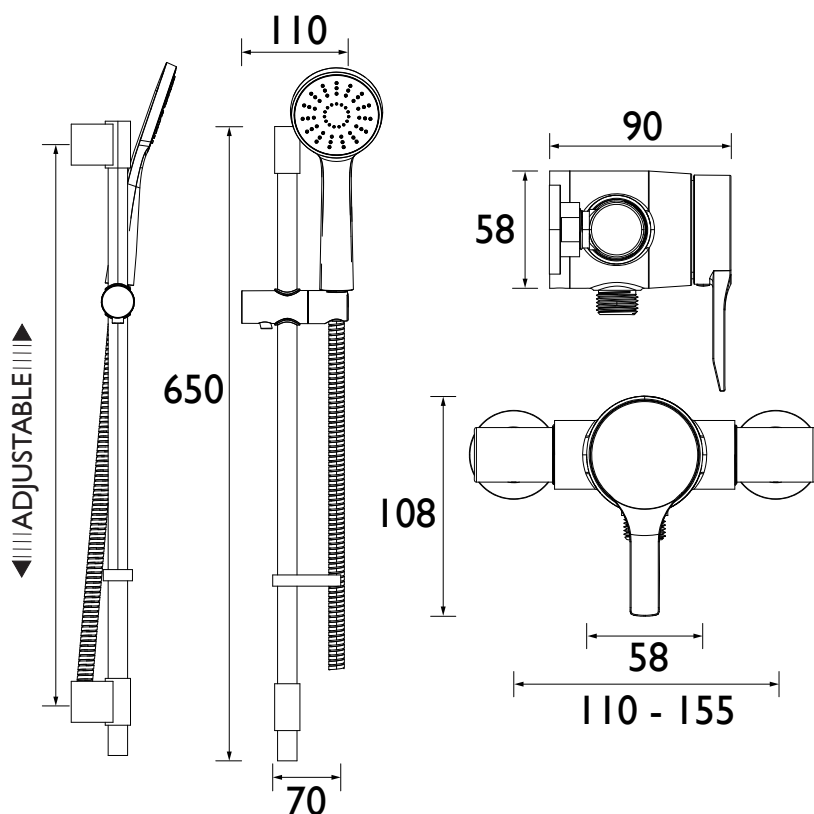

### Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Through Handset (mixed)	1.7	5.4	7.6	8.3	8.8	8.8

## TECHNICAL DATA SHEET



For more products,  
visit our website:  
<http://www.bristan.com>



# BRISTAN

D1.2

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: [www.bristan.com](http://www.bristan.com) Telephone: 0330 026 6273. Email: [enquire@bristan.com](mailto:enquire@bristan.com).

\* - Non-chrome product finishes carry a 3 year guarantee on finish. See [www.bristan.com/guarantees](http://www.bristan.com/guarantees) for more information. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.