

SOLO2-T3LL

COMMERCIAL Tap Range

Solo2 Basin Mixer with Long Lever
and copper tails (no waste)



Features:

- Easy to use long lever single sequential control for temperature and flow
- Complies with HTM04-01
- Automatic thermostatic shut-off in the event of hot or cold water failure
- Above basin access to serviceable parts, limiting down time
- Supplied with non-return valves fitted
- Designed for safe handwash healthcare applications to meet D08 regulations
- Not suitable to deliver potable water

Product Certifications:



WRAS Certificate No: 2105907
WRAS Expiry Date: 31/05/2026




TMV3 Cert. No: NSF2464/0222
TMV3 Expiry Date: 03/02/2027



Specification

Product Type:	Commercial
Main Construction Material:	Brass
Mount Type:	Deck
Handle Type:	Lever
Connection Inlet:	15mm Compression Copper Tails
Connection Outlet:	Open or Aerator Options Available
Number of Tap Holes:	1
Valve/Cartridge Type:	Thermostatic Cartridge
Plumbing System Requirements:	Suitable for all plumbing systems, ideally balanced
Minimum Dynamic Pressure (bar):	0.2 bar
Maximum Dynamic Pressure (bar):	5 bar
Maximum Hot Water Temperature °C:	60°C
Maximum Static Pressure (bar):	10 bar
Flow Type:	Single
Isolation Included:	No

Dimensions (measurements in mm)

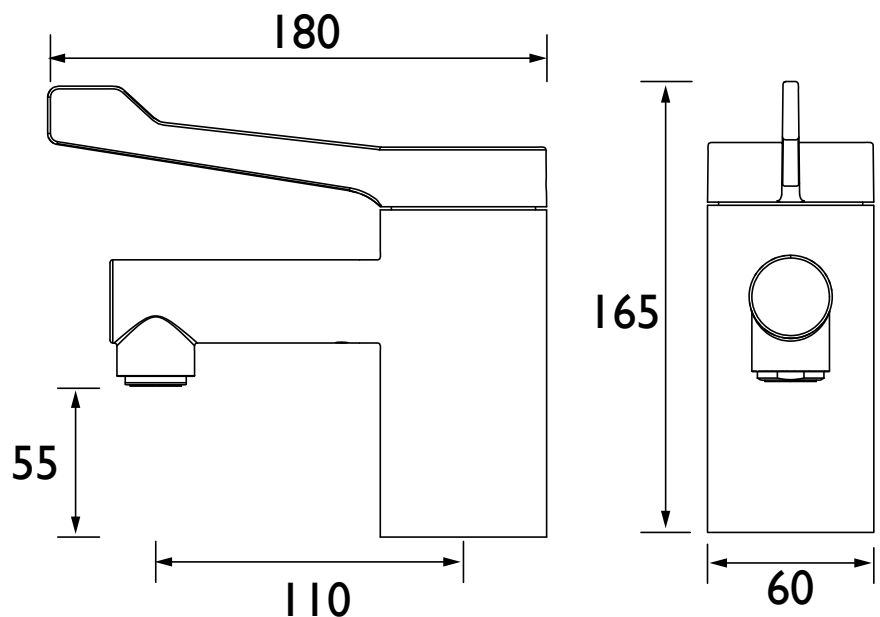

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
SOLO2-T3LL (mixed)	1.1	1.7	2.4	3.3	4.1	5.3

TECHNICAL
DATA
SHEET



BRISTAN

D9

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.