

# TS1503ECP-2000-MK

## GUM Shower Range 15mm Thermostatic Exposed Mixing



### Specification

Finish/Colour:	Chrome
Main Construction Material:	Brass
No of Controls:	1
Shower Type:	Thermostatic Mixing Valve
Shower Head Type:	None
Shower Kit:	N/A
Valve/Cartridge Type:	Sequential Cartridge
Maximum Hot Water Supply Temperature °C:	80
Plumbing System Suitability:	Suitable for all plumbing systems, ideally balanced
Minimum Dynamic Pressure (bar):	0.1
Maximum Dynamic Pressure (bar):	5
Maximum Static Pressure (bar):	10
Connection Inlet:	15mm
Connection Outlet:	15mm
Isolation Valve Included:	No
Check Valve Included:	Yes

### Features:

- Ideal for either single point or limited group applications
- Single adjustable temperature control for user comfort
- Automatic shut-off in the event of hot or cold water supply failure
- Check valves and serviceable filters as standard
- Operates at a maximum pressure differential of 10:1
- 15mm Thermostatic TMV3 Mixing Valve (no shut-off) with Temperature Control.

### Product Certifications:




WRAS Cert. Number: 2310901  
WRAS Expiry Date: 31/10/2028



TMV3 Cert. Number: NSF2014/0718  
TMV3 Expiry Date: 31/10/2023

### Dimensions (measurements in mm)

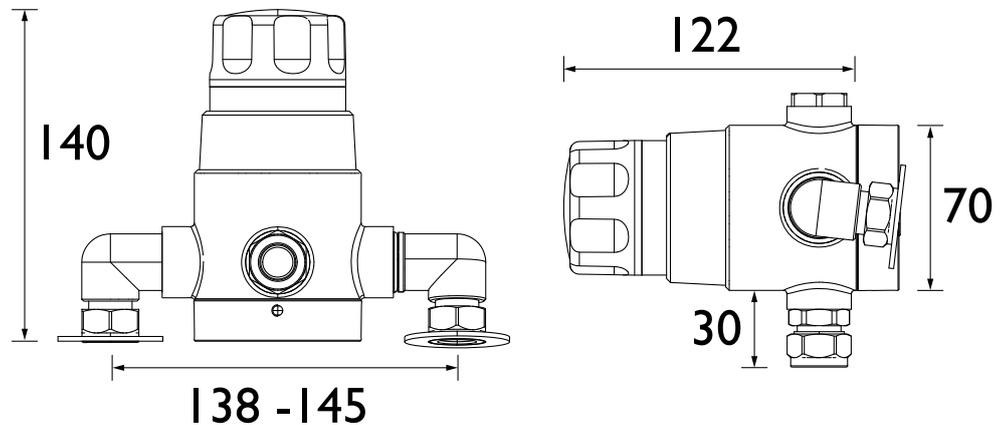

For more products, visit our website:  
<http://www.bristan.com>



### Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Without Flow Limiter	12.9	20.4	28.9	40.8	50	64.6
With Flow Limiter	4.6	6.8	7.1	8.1	8.6	9

## TECHNICAL DATA SHEET



# BRISTAN

D8