

BRISTAN

TAPS & SHOWERS


Installation Instructions & User Guide

Please leave these instructions with the end user

Product code: C SDIVR C (D1)

Specifications

Dynamic Water Pressure

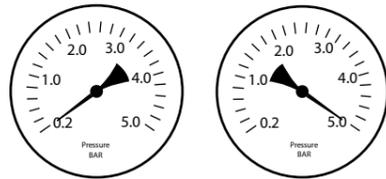

Min: 0.2 bar Max: 5.0 bar

Maximum Static Pressure: 10.0 bar

Tools You'll need




Flat head screwdriver



Adjustable spanner

Inlet Connections



1/2" BSP

Prior to Installation

All products manufactured and supplied by Bristan are safe provided they are installed, used correctly and receive regular maintenance in accordance with these instructions

Isolation valves **must** be fitted to the inlet water supplies to ensure ease of future maintenance.

This valve allows safe flushing of the tap or shower to avoid installation debris to clog up the mechanical areas of the valve.

This product **must** not be modified in any way as this will invalidate the guarantee.


Full access must be made available for future maintenance / servicing purposes.

This product needs to be installed in accordance with, and meet the requirements of the Water Supply (Water Fittings) Regulations 1999 and Scottish Byelaws 2004.

If in doubt, contact a registered plumber or your Local Water Authority or the Secretary of the Institute of Plumbing, address as follows:-

The Institute of Plumbing,
64 Station Lane,
Hornchurch,
Essex,
RM12 6NB, Tel: 01708 472791

Pack Contents

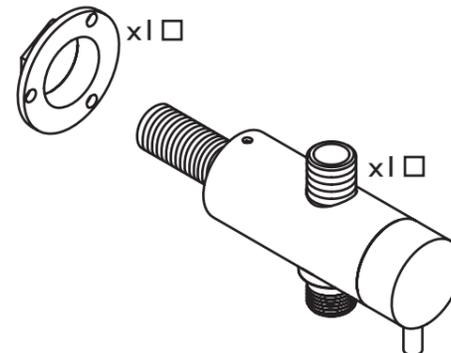

Why not visit our Youtube channel


To see our latest how-to videos, simply scan the QR code with your smart phone or tablet.



Alternatively visit www.youtube.com/bristanTV


Installation

1

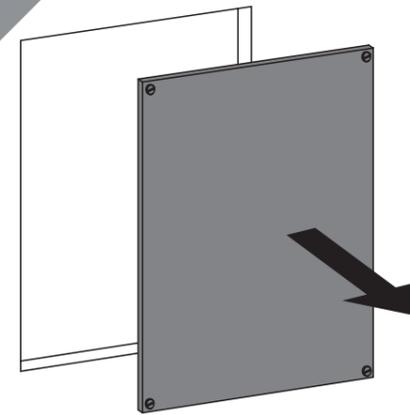


Prepare the pipework. Create the rear access point in the back of the wall cavity.

2

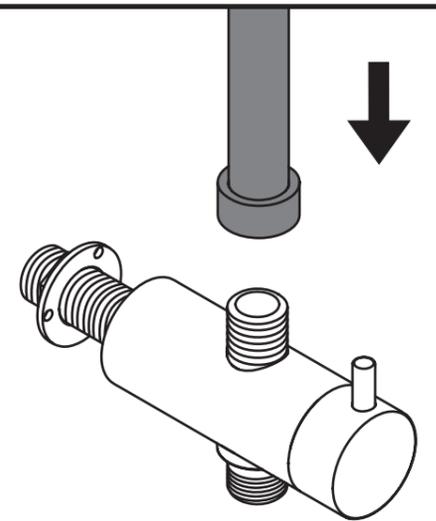


Ensure the olive is positioned correctly and attach the rigid riser to the diverter

3

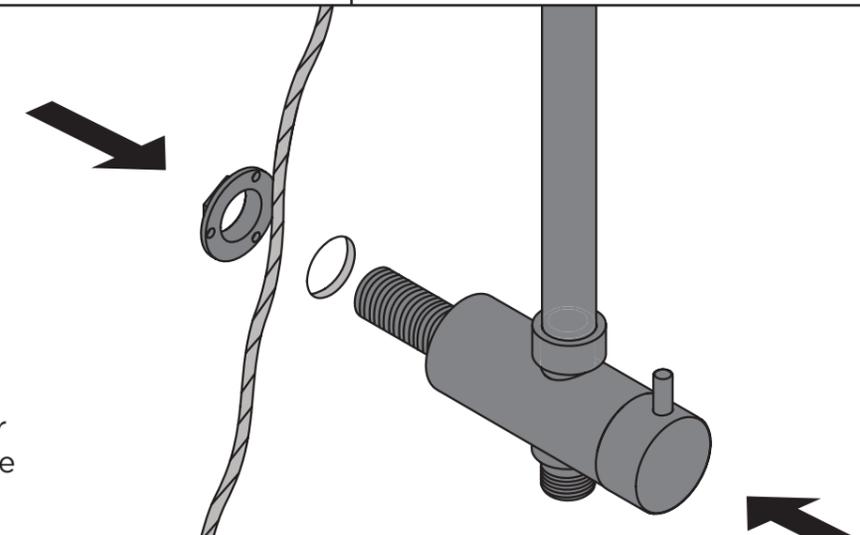


Secure the diverter to the wall using the backnut.

5

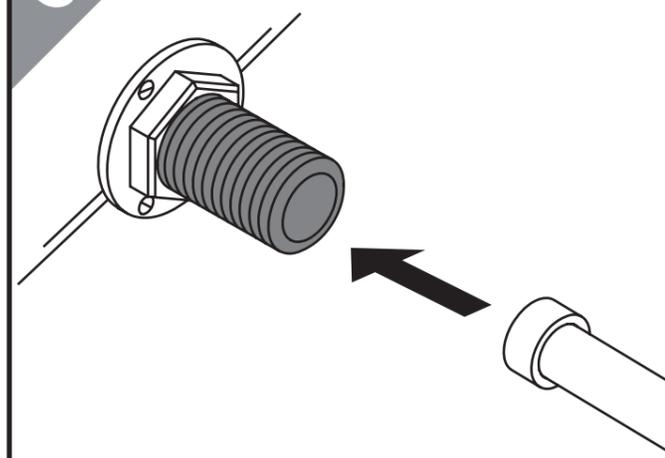


Connect water supply to the diverter inlet

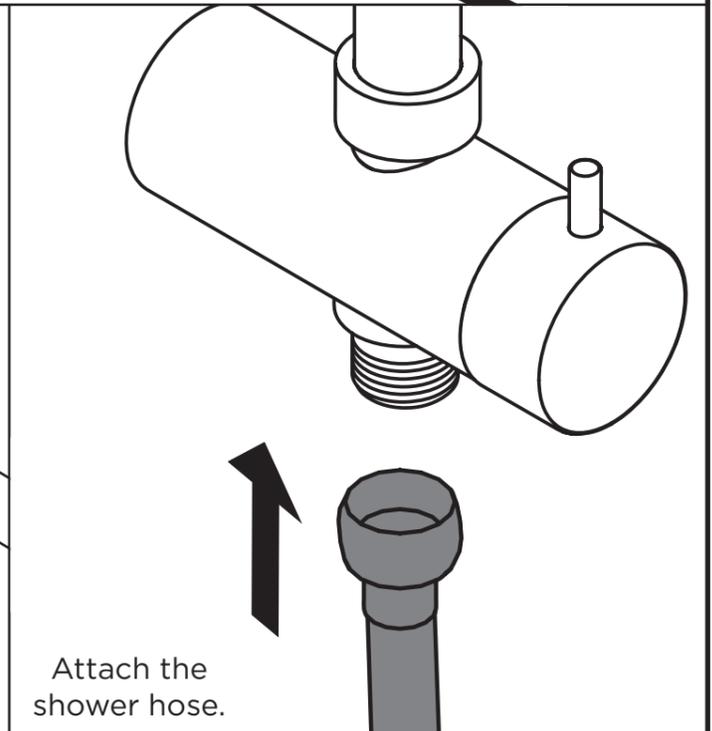

Attach the shower hose.


Operation

1

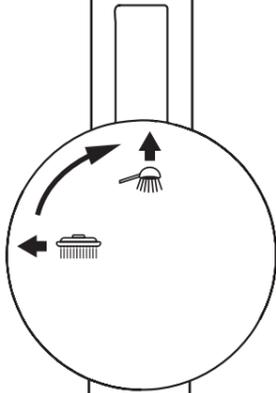

Point the lever upwards to direct water flow to the adjustable riser.

2

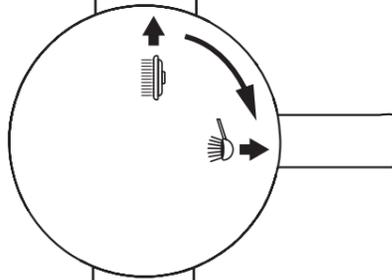


Turn the lever clockwise to direct water flow to the fixed head.

Notes

Maintenance


1

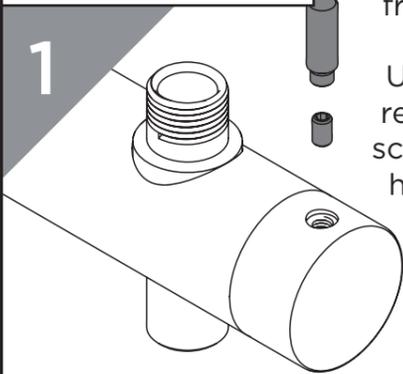

Unscrew the lever from the handle.


Using a hex key, remove the grub screw holding the handle in place.

2

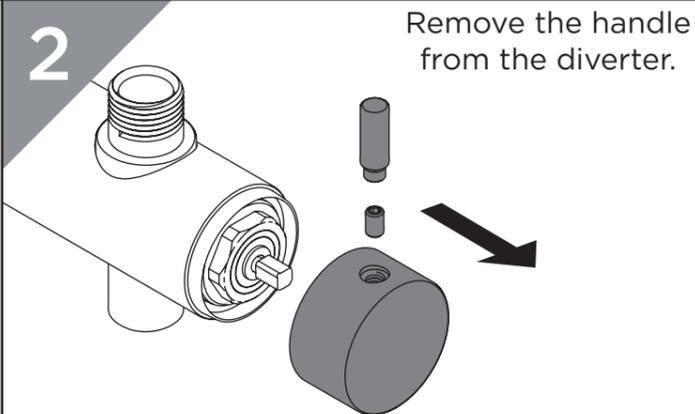

Remove the handle from the diverter.

3

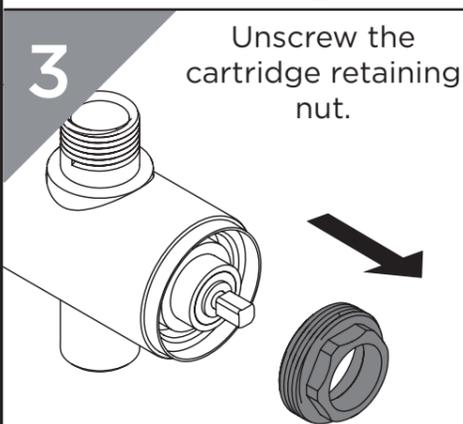

Unscrew the cartridge retaining nut.

4



Remove the diverter and clean.

5



Reverse steps 4-1 to reinstall the diverter.

Spare Parts

To replace any spare parts for your shower why not scan the below QR Code and search for your product.



Servicing Intervals

To reduce the build up of limescale and to ensure this shower works to its maximum performance we recommend this shower is serviced every 6-12 months depending on the hardness of your water.

At Bristan, we want to make things as easy as possible for our customers. That's why we offer solid guarantees on all our products, effective from the date of purchase, to give you peace of mind.

To start your free guarantee simply scan the QR code and register your product. Alternatively visit www.bristan.com/register.

For any other queries, please call our Customer Service on 0330 026 6273 where our expert team of advisors will be able to offer you any help and advice.

For full guarantee terms and conditions visit www.bristan.com/guarantees.

