



Features:

- 15mm inlet connections
- This shower valve has been designed to fit in any UK wall cavity and therefore only needs a 35mm deep cavity space
- Fitting depth including plasterboard and tiles is 60mm - 75mm
- Minimum cold water supply temperature is 4°C
- Maximum hot water supply temperature is 80°C

Product Certifications:



WRAS Certificate Number: 2005900

WRAS Expiry Date: 31/05/2025




For more products, visit our website:
<http://www.bristan.com>



Specification

Style:	Contemporary
Finish/Colour	Chrome
Main Construction Material:	Brass
No of Controls:	3
Shower Type:	Recessed
Shower Head Type:	None
Valve/Cartridge Type:	Thermostatic
Maximum Hot Water Supply Temperature °C:	65
Dynamic Pressure Range: (bar)	5
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	Suitable For All Plumbing Conditions
Working Pressure Range:	Min: 0.2 Bar, Max: 5.0 Bar
Flow Rate: (l/min @ 3 bar)	9.7
Connection Inlet:	Compression Elbows
Isolation Valve Included:	No
Check Valve Included:	Yes

Dimensions (measurements in mm)

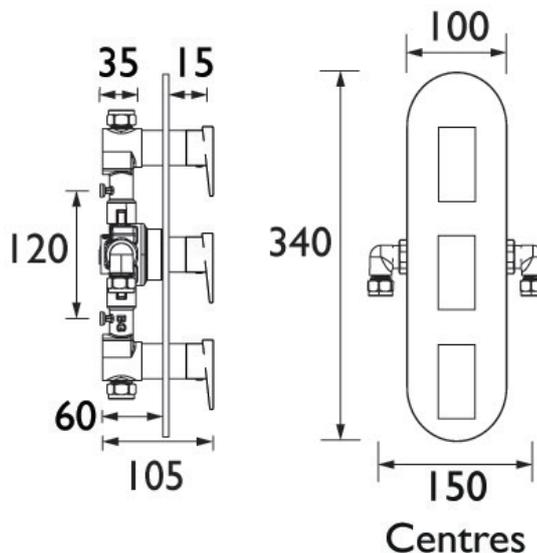

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Outlet 1 With Flow Regulator	--	--	4	7.4	9.7	13.1
Outlet 1 Without Regulator	10.5	11.3	--	--	--	--
Outlet 2 With Flow Regulator	--	--	4.1	7.4	9.7	13.1
Outlet 2 Without Flow Regulator	10.5	11.2	--	--	--	--

TECHNICAL DATA SHEET



BRISTAN