# RS SNK EF BN

## **RENAISSANCE Tap Range**

Renaissance Easyfit Sink Mixer Brushed Nickel



Product Type:	Kitchen Taps				
Main Construction Material:	Brass				
Mount Type:	Deck				
Handle Type:	Lever				
Connection Inlet:	1/2" BSP Female Flexible Tails				
Connection Outlet:	M24 Flow Straightener				
Number of Tap Holes:	1				
Valve/Cartridge Type:	1/2" Ceramic Disc Valve - 1/4 turn				
Plumbing System Requirements:	Suitable for all plumbing systems, ideally balanced				
Minimum Dynamic Pressure (bar):	0.4 bar				
Maximum Dynamic Pressure (bar):	5 bar				
Maximum Hot Water Temperature °C:	65°C				
Maximum Static Pressure (bar):	10 bar				
Flow Type:	Single				

Yes

Dimensions (measurements in mm)

Specification

#### Features:

- A traditional twin lever kitchen tap featuring Top Fix Easyfit technology.
- Unique patented top fix design, for simple installation from above the sink.
- Simply drop and twist the top fix base into the tap hole from above, and lock into place with the Allen key provided.
- Two supplied isolation valves and flexi tails mean you can connect to the water supply at this point and isolate the base.
- Push the tap on to the base and secure into position with the supplied Easyfit tool and
- Everything you need in the box including an Allen key, isolation valves, Top Fix Easyfit base, Easyfit tool and flexi tails
- Swivel spout for easy use
- Long life 1/4 turn ceramic disc valves for added durability and smooth control.
- High quality metal fixings for security and durability
- Also available in other finishes.
- 10 year parts and 1 year labour guarantee for peace of mind.


### **Product Certifications:**




WRAS Certificate No: 2206902 WRAS Expiry Date: 30/06/2027







Isolation Included:

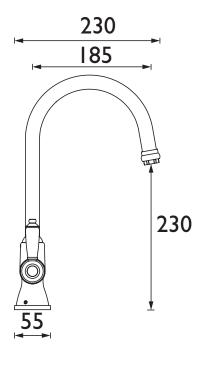

Flow Rates (I/min)								
System Pressure (bar)	0.4	0.5	1	2	3	5		
RS SNK EF BN (mixed)	14.1	16	22.1	33.3	40	50.1		

### TECHNICAL DATA SHEET



